



TM-Mounting
type 10-TM-2000
 Max. 2000 kg - 16 mm - 4Hz


GM-Mountings are very suitable for stationary and mobile cooling and ventilation applications. These compact anti-vibration mountings are easy to install and offer a high level of vibration and acoustic insulation. The integrated rebound control-device limits excessive movement under external loads. GM-Mountings are available in several rubber mixes to accommodate a large load range. These mountings can be supplied with a height adjustment feature and are also available with M12 and M20 inner thread. (Corrosion protection: zinc plated + powder coated metal parts)

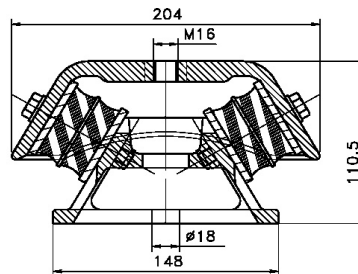


Applications: Cooling equipment (screw, scroll, piston, centrifugal and absorption machines), heat pumps, condenser units, compressor sets, etc.

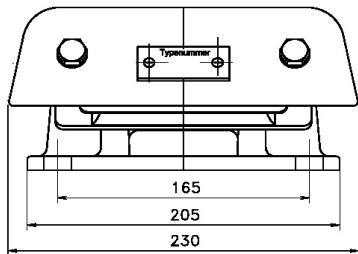

Typenr. 10-TM-2000-N

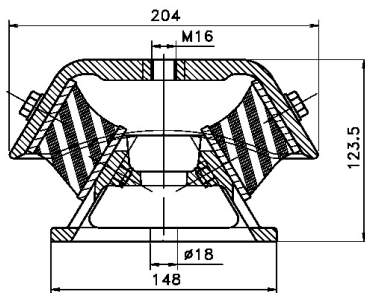


Typenr. 10-TM-2000-H



Typenr. 10-TM-2000-T

LOAD CHARACTERISTICS 10-TM-2000-H

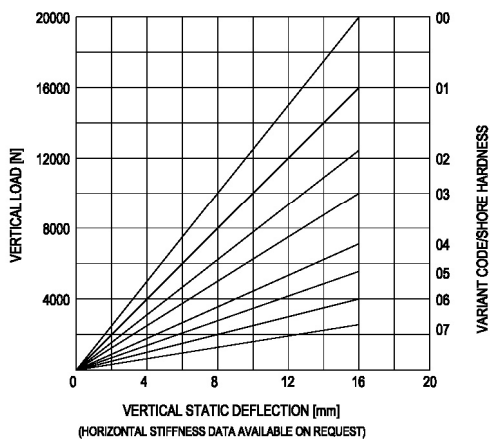

LOAD CHARACTERISTICS 10-TM-2000-N

